DRIGER®

enquiry@driger.tech

USER MANUAL

MA404F

4K60 4x4 HDMI Matrix Switcher with EDID management



Safety Reminder

To protect the device and operating personnel from electrostatic discharge, you need to check and ensure that the device is grounding well before the device is powered on. Please observe the following when you install, use, maintain this equipment.



Make sure the deviceground connecon.

Important Safety Instrucons



Warnings of FCC

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protecon against harmful interference in a residenal installaon. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instrucons, may cause harmful interference to radio communicaons. However, there is no guarantee that interference will not occur in a parcular installaon. If this equipment does cause harmful interference to radio or television receipon, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separaon between the equipment and decoder.

-- Connect the equipment into an outlet on a circuit dierent from that to which the decoder is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

Changes or modicaons not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

1. Product Introduction

This is a new xed 4K60 HDMI matrix switcher with 4 HDMI2.0 inputs and 4 HDMI2.0 outputs, the resoluon can up to 4K60Hz and all ports are HDCP2.2 compliant. With the friendly user control methods by IR remote control, 2-Press push buons with background blue light, WEB GUI, APP and RS232/UDP commands, this matrix switcher can work with the Blu-Ray Players, Set-Top boxes, Home Theater, and game consoles etc HDMI input sources to route to the HDMI displays, it has been widely used in dierent audio visual applicaons.


2. Features

- 4 HDMI2.0 inputs
- 4 HDMI2.0 outputs with one independent 3.5mm/SPDIF audio
- Supports HDMI2.0, HDCP2.2
- The resoluon can up to 4K@60Hz
- Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital and DTS-HD Master Audio
- Supports IR remote control(IR remote control codes are available)
- Supports smart EDID management, including 4-output EDID, 15 internal EDID.
- Supports RS-232 and TCP/IP Control(WEB GUI, APP and IR remote)
- Supports 2-press push buons control with blue lights
- Supports to rename the inputs and outputs, scenes

3. Specification

Name	FIXED 4K60 4x4 HDMI2.0 Matrix Switcher
Resoluons	480i, 576i, 480p, 576p, 720p, 1080i, 1080p@24/30/50/60Hz, 4K@60Hz
Input ports	4 * HDMI, 1* RS-232(control), 1 * RJ-45(control)
Output ports	4 * HDMI, 1* RS-232(control),1*3.5mm/SPDIF audio
ESD Protecon	±8kV (Air-gap discharge), ±4kV (Air-gap discharge)
Controlling	IR remote control, front buons control, RS232, UDP
Power	DC: 12V 2A
Dimension(mm)	440*260*44(mm)
Weight	4kg

4. Connection Diagram

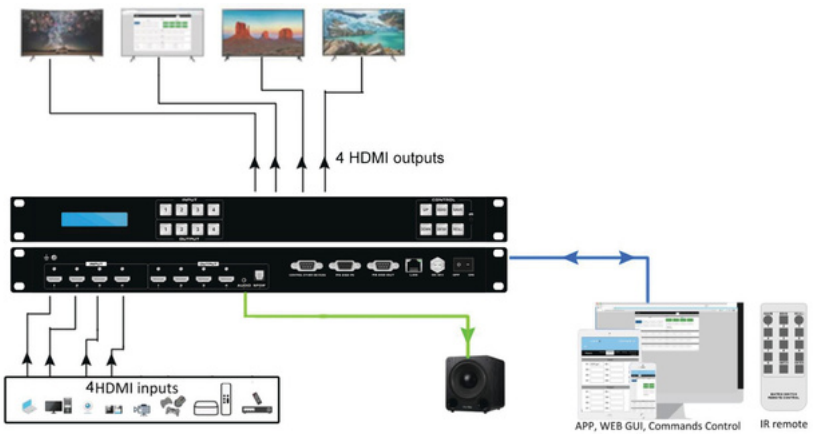

5. Packing

No.	Name	Qty	Unit
1	HDMI Matrix Switcher	1	Pcs.
2	DC 12V2A power adapter	1	Pcs
3	Remote Control	1	Pcs
4	Rack ear	2	Pcs

6. Panel description

Front panel



① **LCD screen**: for the switching, EDID, IP etc information display.

② **INPUT**: 4 HDMI input buttons

③ **OUTPUT**: 4 HDMI output buttons

④ **CONTROL:**

UP: for upward controlling, or when press input and press UP to all outputs

EDID: Press it to enter EDID set mode.

SAVE: Press to save the switching status.

Down:for upward controlling

ENTER: Press to confirm to save the setting.

RECALL: Press it to recall the presets/scenes.

⑤ **IR**: IR receiver for the IR remote control

Back panel



① For the ground wiring

② INPUT: 4 female HDMI Input ports

③ 3.5mm audio output from output 1

④ OUTPUT: 4 female HDMI output ports

⑤ Control other devices: from the WEB GUI setup to pull out the commands

⑥ RS232 IN: Female RS232 port for the R232 control

⑦ RS232 OUT: Famle RS232 port for the RS232 control

⑧ LAN: for the IP/TCP control, the default IP address is 192.168.1.80

⑨ DC12V: power supply port

⑩ **ON/OFF:** power on/off switch

7. Matrix Switcher control

This Matrix switcher can support IR remote, APP, RS232/TCP/IP software, WEB GUI browser or the front push-buttons control.

Remote Control

Users also can control this matrix switcher with the remote control. Note the below buttons are not functional on this product: Standby, Auto, 4K, 1080p,720P, 1366

Channel switching:

Press the input from number “1~8”, then press the output from number“1~9”, can press the outputs continually.

Eg. Switch input 1 to output 1, 2, 3:

INPUT 1 → OUTPUT 1, 2, 3



Switch any inputs to all outputs:

Press input from number “1~8”, then press “UP” or “ALL” button.

SAVE: for the preset cave. “SAVE” → select from the INPUT buttons(1~8) OUTPUT buttons(1~9) → “ENTER”, will hear a beep sound.

RECALL: for the saved presets recalling. “RECALL” → select from the INPUT buttons(1~8) OUTPUT buttons(1~9) → “ENTER”, will hear a beep sound.

MENU: for back to homepage/status


CLEAR: to disconnect the selected input to the outputs

ENTER: to confirm the switching, scenes save&recall

WEB GUI/APP control

For the WEB GUI control, recommend the Google Brswoer and for the APP control, can get from the Google play or Apple store by searching keywords “MCS”, then need to make sure the Matrix switcher is connected to the WIFI router and the mobile devices is connected to the same WIFI. The default IP address of the matrix switcher is 192.168.1.80.


Open the WEB GUI/APP and Enter the IP address of the matrix switcher:

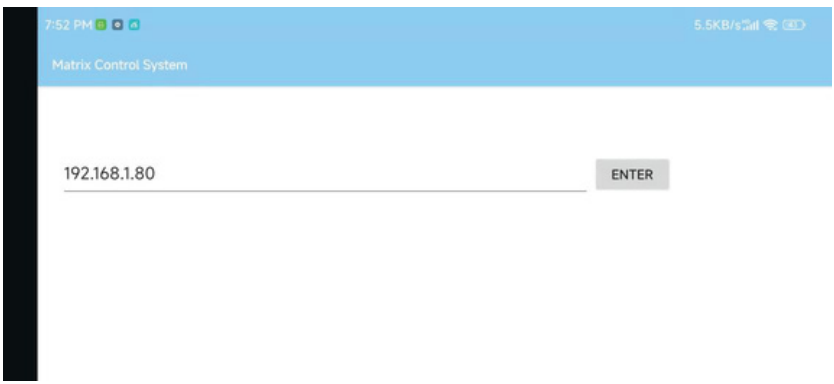


Click Enter and login with the user name and password, the default User name is admin, password is admin.




Click Submit to login after typing the correct user name and password, and it will turn to the home interface for the sources Switch, Scene Recall/Save:

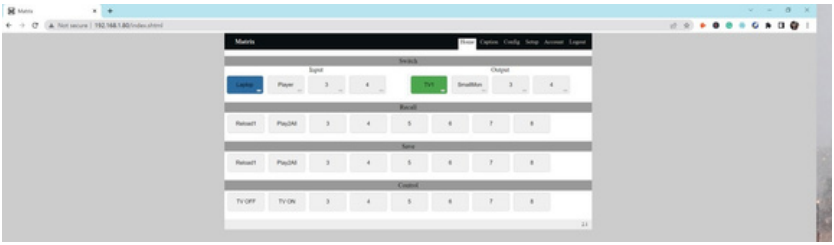


Users can change input, output and Scenes names here, up to 8 characters.

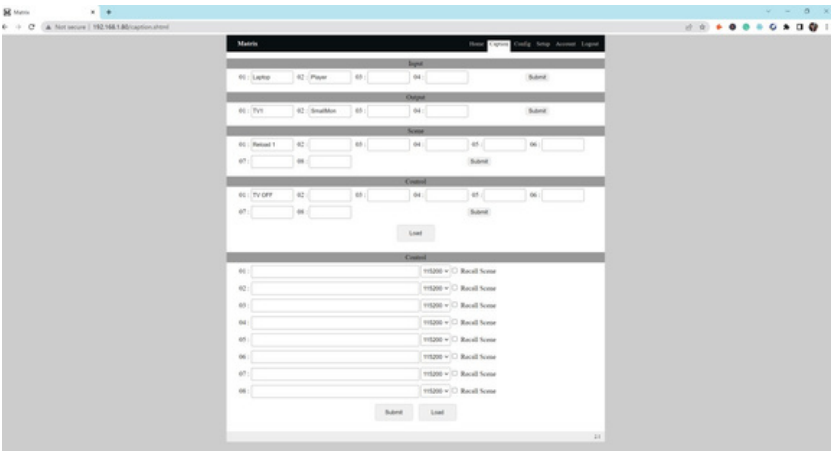


Users can do EDID and audio selection from the Config tap:

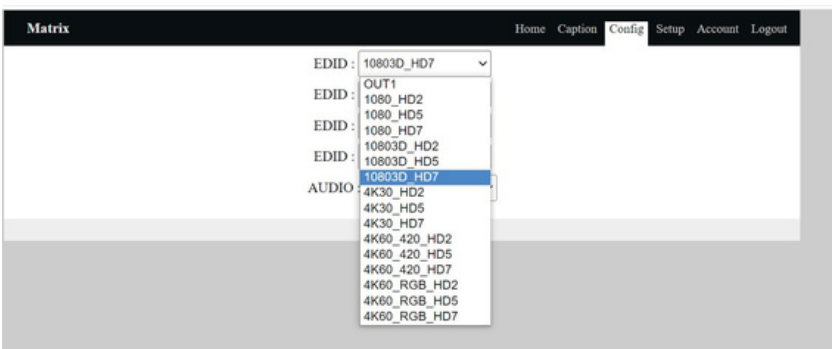


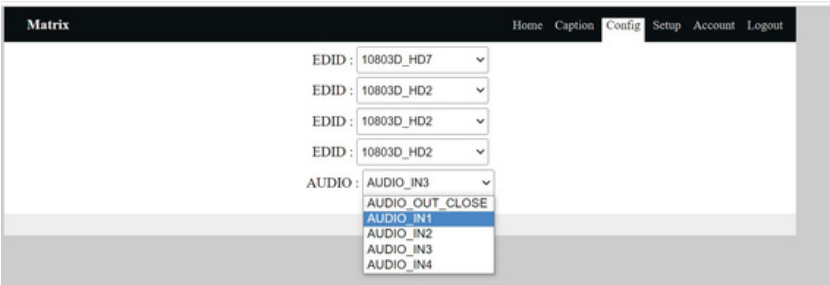

Users also can do the se$_{tti}$ngs for the “Setup” tap

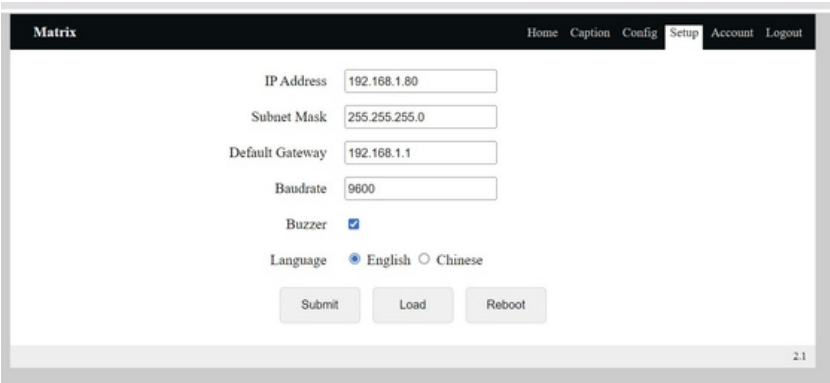



Users can change the default user name and password from the “Account” Tap:

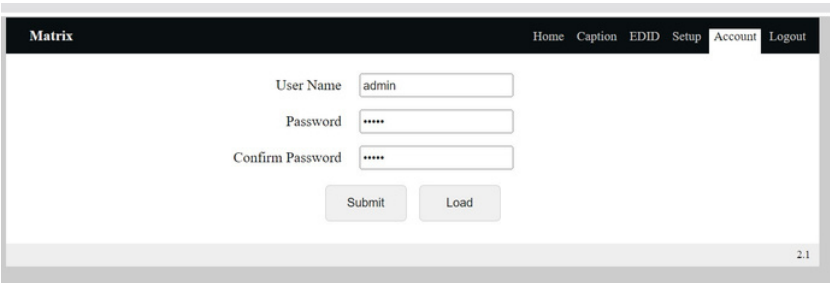

The 3rd Party Control command

IP address: 192.168.1.80 (default IP)
Protocol: TCP(5000), UDP(4000)

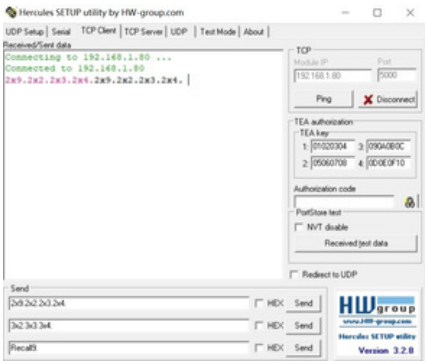


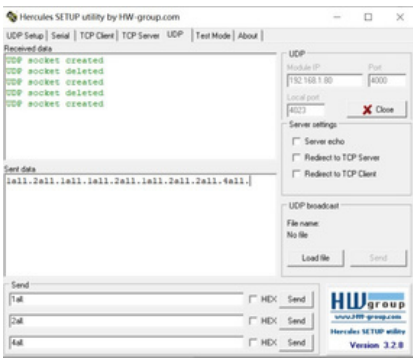

RS232

Baud rate: 9600, N, 8, 1

Use RS232 direct cable

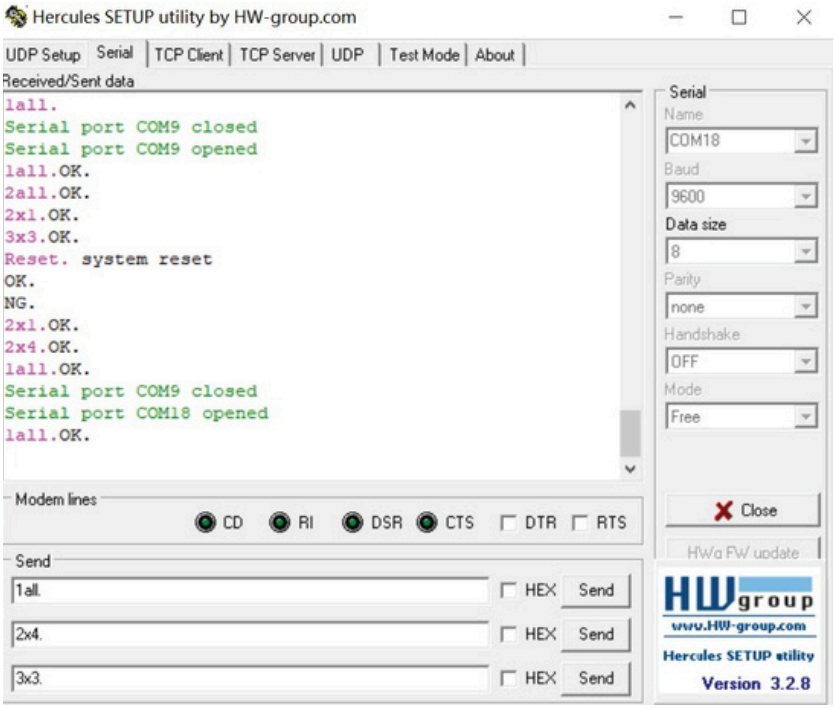

Commands	Funconal descripon	Example
Yall.	Switch Input Y to all outputs.	**all.**
YxY.	Switch input Y to output Y:	**2x9.**
YxY.YxY.Yx	Switch input Y to output Y:	**3x2.3x3.3x4.**
Y. SaveY.	Save to scene Y.	**Save2.**
Recall[y].	Recall the save scene Y	**Recall10.**
Reset.	To reset account to admin/admin, IP address to default 192.168.1.80	
AudioY.	Select the input to audio out	Switch IN1 to audio outputs: **audio1.**
BuzzerOn.	Turn on the switching beep sound	
BuzzerOff	Turn off the switching beep sound	
Reset.	To reset account to admin/admin, IP address to default 192.168.1.80	

8. Common Problem Shooting

Q: Serialportoperaonisoutof order, can not control to switch?

A: Theserialportisdamagedor not started

Soluon: Make sure the port uses direct serial port line, check the connecon of PC sowareserial port.

Power failure: Check the power fuses and connecng lines;

Signal interference: Make sure the cables and plugs are connected well, the cables meet the

requirements, the system is ground connected well, the AC power between devices have the same grounding system;

Accidental damage: Sent back to the manufacturer for recondion.

9. After-Sales

9.1 Warranty Informaon

The Company warrants that the process and materials of the product are not defecve under normal use and service for 2 (2) years following the date of purchase from the Company or its authorized distributors.

If the product does not work within the guaranteed warranty period, the company will choose and pay for the repair of the defecve product or component, the delivery of the equivalent product or component to the user for replacement of the defecve item, or refund the payment which users have made.

The replaced product will become the property of the Company.

The replacement product could be new or repaired.

Whichever is longer, any replacement or repaired of the product or component is for a period of ninety (90) days or the remaining period of the inial warranty. The Company shall not be responsible for any soware, rmware, informaon, or memory data contained in, stored in, or integrated with the product repaired by the customer's return, whether or not during the warranty period.

9.2 Warranty limitaons and excepons

Except above limited warranty, if the product is damaged by over usage, incorrectly use, ignore, accident, unusual physical pressure or voltage, unauthorized modicaon, alteraon or services rendered by someone other than the Company or its authorized agent, the company will not have to bear addional obligaons. Except using the product properly in the proper applicaon or normal usage.