


## 4K60 inputs Video wall controller with 4 HDMI outputs

DPB-2400U

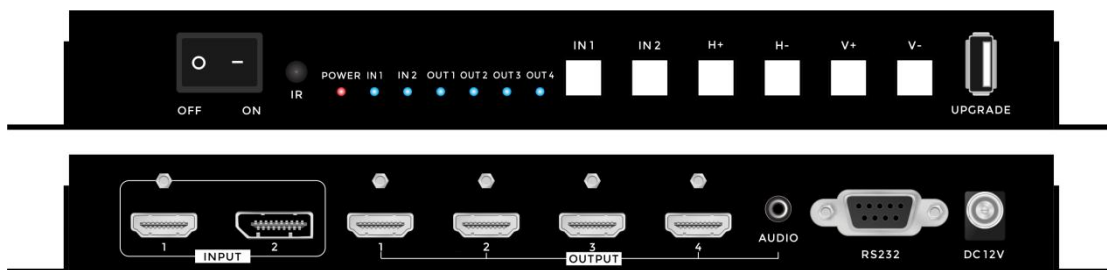

## Features

- ▼ Supports 2 inputs, resolution up to 4K60
- ▼ Supports 4 HDMI with 1920\*1200@60 resolution outputs
- ▼ Supports the splicing edge adjustment
- ▼ Supports the IR remote, push-button control and RS232 commands
- ▼ Outputs support image 90, 180 and 270 degrees rotation
- ▼ Supports multiple splicing ways: 2x2, 1x4, 4x1, 1x3 ...
- ▼ Supports HDMI 2.0, HDCP compatible


This TV Wall controller is designed to be a truly capture, AD convert, route, distribute all-format signal to the video wall(LCD displays), while maintaining a true digital signal. The controller with many different video interfaces, include 2 inputs(HDMI+DP) with up to 4K60 resolution and 4 HDMI outputs with 1080P resolution and 3.5mm audio output. Supports different Video Wall modes, 1x2, 1x3, 1x4, 2x2 etc, with the 4K input and 1080P output, it can realize the point to point(pixel to pixel) display. This controller can be controlled by remote control, front buttons and RS232 commands.

## Specification

NAME	DPB-2400
Product name	4K60 TV wall controller
Control	Front buttons, remote control, RS232 commands
Input	1* HDMI, 1*DP
Output	4*HDMI, 1*3.5mm audio
Resolution	Input: 1920X1080,1920X2160,1920X3240,1920X4320,3840X1080,3840X2160,5760X1080, 7680X1080 Output: 1920*1200@60Hz
Display splice mode	2x2, 1x4, 4x1, etc...
Power Supply	DC 12V3A
Power Consumption	10W
Dimension (WxHxD)	223*104*27mm
Weight	2.5KG/ 5.5lbs
Operating Temperature	-10°C to 50°C
Storage Temperature	-25°C to 55°C

## Dimension

**Product size(223\*104\*27mm):**

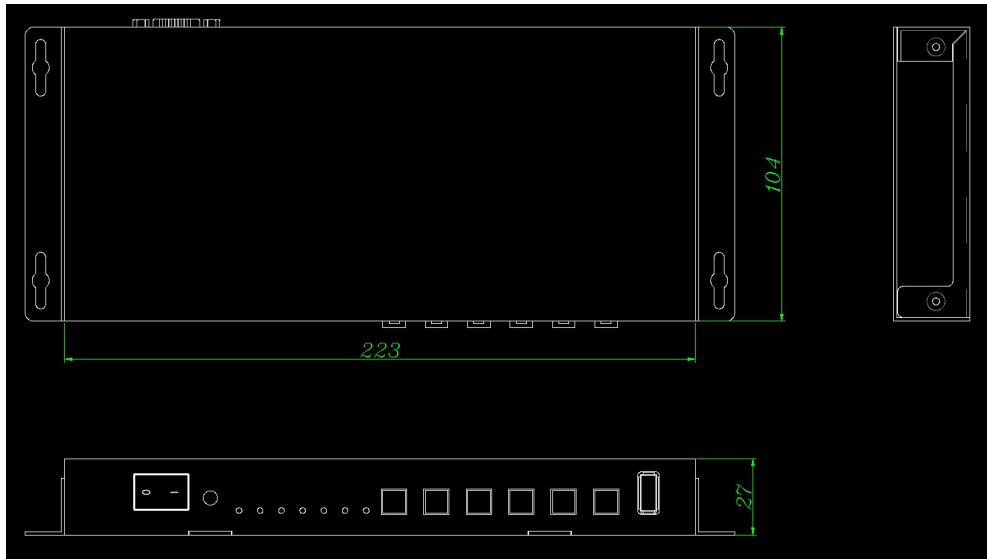

## Ports & Components

