


4K2K HDMI 8x9 Matrix Switcher with APP/WEB/IR Remote/PC software control

MA809FE

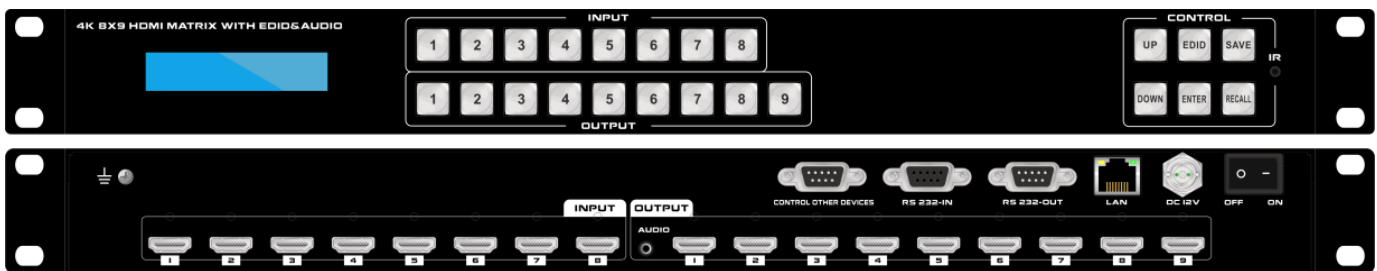

Features


- ▼ 8 HDMI inputs and 9 HDMI outputs
- ▼ Support 1 audio(3.5mm) de-embedded
- ▼ Supports HDMI1.4, HDCP1.4
- ▼ The resolution can up to 4K@30Hz
- ▼ Deep Color support 48/36/30/24-bit
- ▼ Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital and DTS-HD Master Audio
- ▼ Supports IR remote control (IR remote control codes are available)
- ▼ Supports smart EDID management, including 8-output EDID, 15 internal EDID
- ▼ Supports RS-232 and TCP/IP Control (WEB GUI, APP and IR remote)
- ▼ Supports 2-press push buttons control with blue lights
- ▼ Supports to rename the inputs and outputs, scenes

This is a new fixed 4K2K HDMI matrix switcher with 8 HDMI inputs and 9 HDMI outputs, the resolution can up to 4K30Hz and all ports are HDCP compliant. With the friendly user control methods by IR remote control, 2-Press push buttons with background blue light, WEB GUI, APP and RS232/UDP commands, this matrix switcher can work with the Blu-Ray Players, Set-Top boxes, Home Theater, and game consoles etc HDMI input sources to route to the HDMI displays, it has been widely used in different audio visual applications.

Specification

Name	FIXED 4K2K 8x9 HDMI Matrix Switcher
Resolutions	480i, 576i, 480p, 576p, 720p, 1080i, 1080p@24/30/50/60Hz, 4K@30Hz
Input ports	9 * HDMI, 1* RS-232(control)
Output ports	± 8kV (Air-gap discharge), ± 4kV (Air-gap discharge)
Controlling	IR remote control, front buttons control, RS232, UDP
Power	DC:12V 2A
Dimension(mm)	440*150*44(mm)
Weight	2kg

Dimension

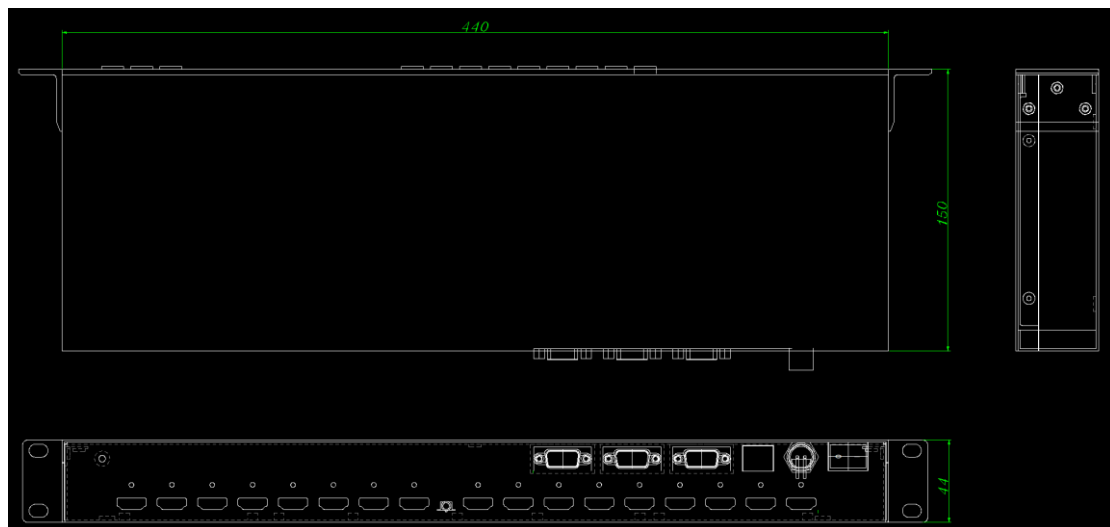

Ports & Components

Connection diagram

